
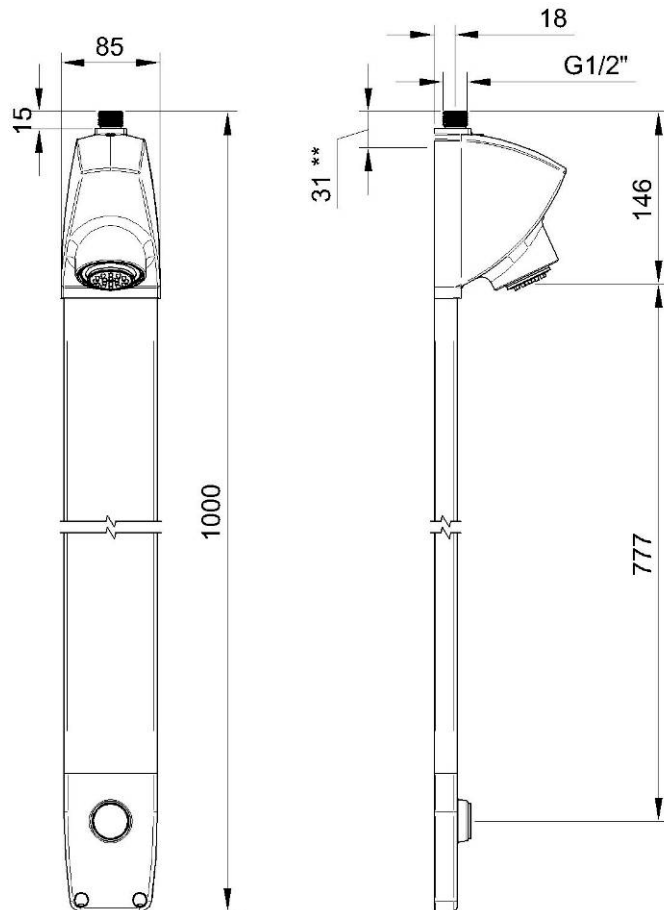




ARTICOLO / Item  
 Artículo / Article

**09290**

- Pannello doccia ad arresto temporizzato "SLIM"
- Shower panel with self closing tap "SLIM"
- Panel ducha con grifo temporizado "SLIM"
- Panneau douche avec robinet temporisé "SLIM"

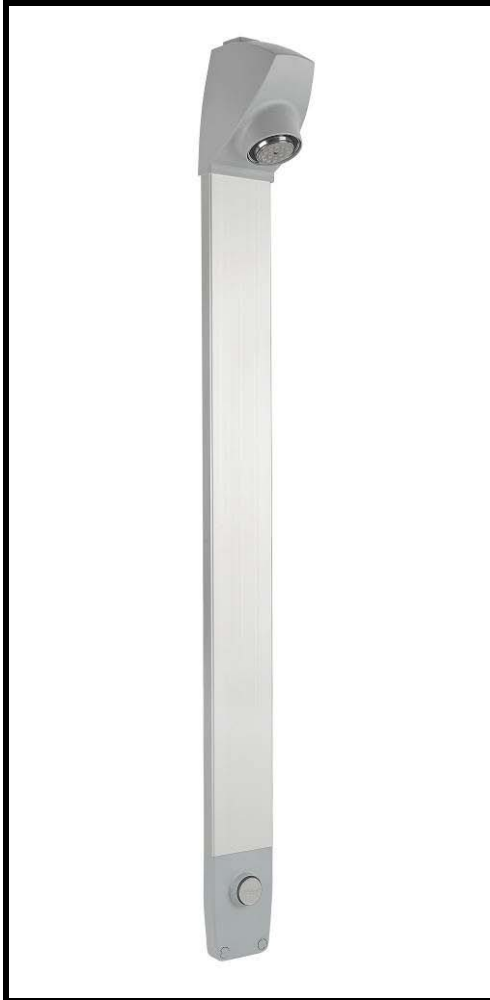

<b>Pressione di alimentazione</b> / Operating pressure / Presión de alimentación / Pression d'alimentation	Min 1,5 max 6 [bar]
<b>Pressione raccomandata</b> / Recommended pressure / Presión recomendada / Pression recommandé	2 – 4 [bar]
<b>Temperatura di alimentazione</b> / Water temperature / Temperatura de alimentación / Température d'alimentation	5 – 65 °C
<b>Tempo di erogazione</b> / Flow time / Tiempo de descarga / Temporisación	25 (+5/-10) sec @ 3 [bar]
<b>Portata</b> / Flow rate / Caudal / Débit	8 l/min (c/limitatore, w/flow limiter, c/limitador de caudal, avec limiteur de débit)
<b>Struttura/Structure/Estructura/Structure</b>	Alluminio, Plastica ABS/Aluminium, Plastic, Aluminium, Plastico, Aluminium, Plastique
<b>Dotazione/Equipments/Dotaciones/Équipements</b>	Kit di fissaggio, limitatore di portata 8 l/min, raccordo per alimentazione da parete/fixing kit, 8l/min.flow limiter, joint for wall feeding; kit de fijación, limitador de caudal 8l/min., niple por alimentación a pared; kit de fixation, limiteur de debit 8l/min., raccord pour alimentation mural
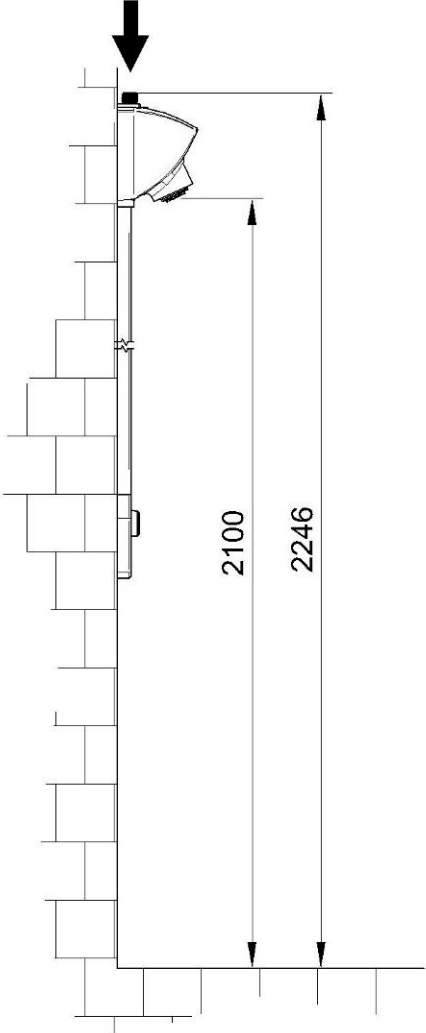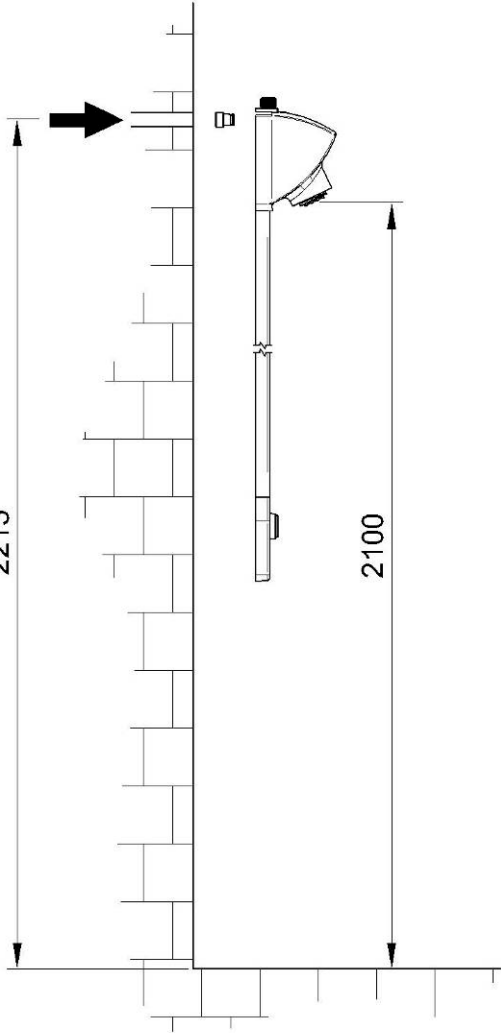
<b>ALIMENTAZIONE ESTERNA/ EXTERNAL WATER SUPPLY CON ALIMENTACIÓN EXTERNA AVEC ALIMENTATION EXTERNE</b>	<b>**ALIMENTAZIONE DA PARETE WALL WATER SUPPLY CON ALIMENTACIÓN A PARED AVEC ALIMENTATION MURAL</b>
 <p>2100 2246</p>	 <p>2215 2100</p>